

# Technical Data

## 20 x 191mm T&G Engineered Oak


Natural Oak: Brushed & UV Lacquered | ENG-OAK-4432



### Product Photo:



### Board Construction:

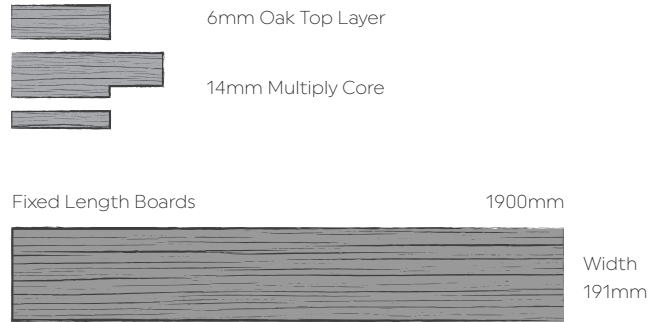

### Product Specification & Handling Information:

Board Depth:	20mm
Board Width:	191mm
Board Length:	1900mm
Pack Size:	1.8145m <sup>2</sup>
Pack Weight:	22kg
Packs Per Pallet:	36

### Manufacturer Testing Standard:

Standard:	EN14342:2013 - Multi-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	650 kg/m <sup>3</sup>
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.12 W/mK

### Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & UV Lacquered
Bevel Detail:	4V Bevel
Density of Finish:	NPD
Fix System:	T&G
Grade:	Rustic
Core Material:	Multiply
Janka Reading:	1360

### Misc Items:

Residential Warranty:	20 Years
Commercial Warranty:	5 Years
Oak Origin:	Germany
Manufactured In:	PRC
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

### Key Features:



### Accreditations:

