

Technical Data


20 x 240mm T&G Engineered Oak

Natural Oak: Brushed & Oiled | ENG-OAK-4450

Product Photo:



Board Construction:

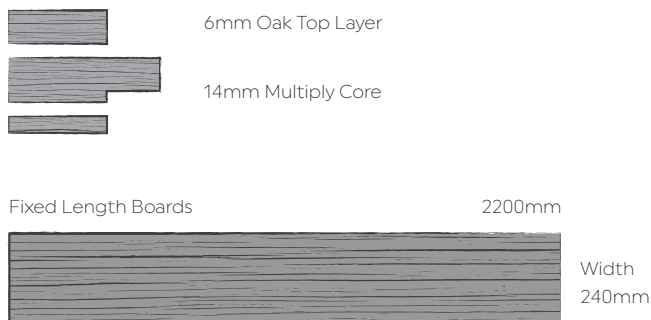

Product Specification & Handling Information:

Board Depth:	20mm
Board Width:	240mm
Board Length:	2200mm
Pack Size:	2.64m ²
Pack Weight:	32.5kg
Packs Per Pallet:	36

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Multi-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	650 kg/m ³
Minimum Thickness:	20mm
Formaldehyde:	E-1
Thermal Conductivity:	0.16 W/mK

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & Oiled
Bevel Detail:	4V Bevel
Density of Finish:	1.1g/cm ³
Fix System:	T&G
Grade:	Rustic
Core Material:	Multiply
Janka Reading:	1360

Misc Items:

Residential Warranty:	20 Years
Commercial Warranty:	5 Years
Oak Origin:	European
Manufactured In:	PRC
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:

