

Technical Data


14 x 190mm T&G Engineered Oak

Smoked & Whitewashed: Brushed & Oiled | ENG-OAK-5016

Product Photo:



Board Construction:

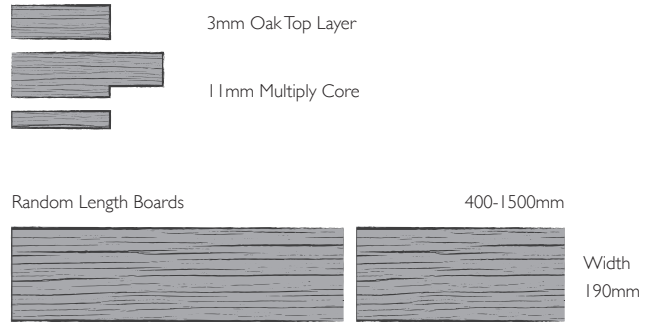

Product Specification & Handling Information:

Board Depth:	14mm
Board Width:	190mm
Board Length:	Random Lengths (400-1500mm)
Pack Size:	2.508m ²
Pack Weight:	22.82kg
Packs Per Pallet:	55

Manufacturer Testing Standard:

Standard:	EN14342:2013
Reaction to Fire:	Dfl -s1
Minimum Density:	650kg/m ³ /15.3mm
Minimum Thickness:	14mm
Formaldehyde:	E-1
Thermal Conductivity:	0.16W/Mk

Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & UV Oiled
Bevel Detail:	4V Bevel
Density of Finish:	650kg/m ³ /15.3mm
Fix System:	T&G
Grade:	Rustic
Core Material:	Multi-Ply
Janka Reading:	19,4kN

Misc Items:

Residential Warranty:	On Request
Commercial Warranty:	On Request
Oak Origin:	Europe
Manufactured In:	PRC
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:

