


Technical Data

14 x 130mm 5G Engineered Oak

Board Construction:

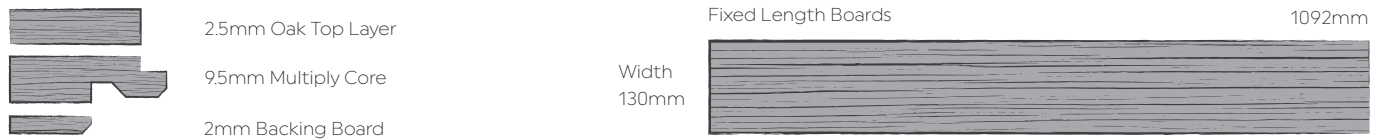

Product Specification & Handling Information:

Board Depth:	14mm	Pack Size:	0.9937m ²
Board Width:	130mm	Pack Weight:	8.6kg
Board Length:	1092mm	Packs Per Pallet:	49

Board Detail:

Type of Board:	Engineered Wood Flooring	Fix System:	Välinge 5G LOC
Finish:	Lacquered Natural Oil	Grade:	Rustic / Character
Bevel Detail:	4V Bevel	Core Material:	Pine
Density of Finish: According to EN13489 Testing Brinell (EN1534)	Average Hardness 37 MPa	Janka Reading:	1360

Manufacturer Testing Standard:

Standard:	EN14342:2013 - Three-layer Flooring Board		
Reaction to Fire:	Dfl - s1	Formaldehyde:	E-1
Minimum Density:	500 kg/m ³	Thermal Conductivity:	0.14 W/mK
Minimum Thickness:	14mm	Biological Stability:	NPD

Misc Items:

Residential Warranty:	15 Years	Commercial Warranty:	On Application
Oak Origin:	Europe	Manufactured In:	Poland
Installation Type:	<input checked="" type="checkbox"/> Float <input checked="" type="checkbox"/> Bond <input checked="" type="checkbox"/> Nail	Underfloor Heating	Suitable *

* Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

Key Features:



Accreditations:



Timba Floors & Boards is a trading style of B2B Wood Products Ltd.

©Copyright 2021

At the time of writing all information is specified correctly. The company reserves the right to change specifications of this product at any time without prior notice to third parties. The photographs used in this document are only intended as a visual references. No rights can be derived from the them.