


# Technical Data

18 x 150mm T&G Engineered Oak  
Brushed & Matt Lacquered | ENG-OAK-5009

## Product Photo:



## Board Construction:

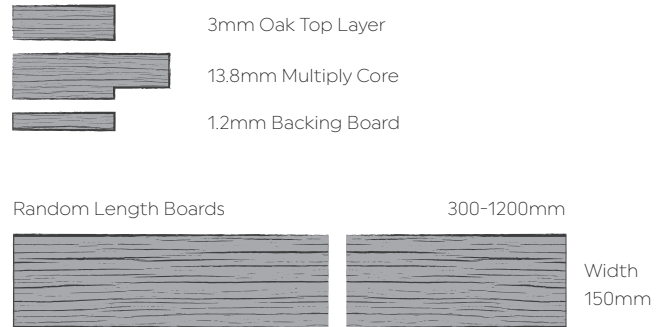

## Product Specification & Handling Information:

Board Depth:	18mm
Board Width:	150mm
Board Length:	Random Lengths (300-1200mm)
Pack Size:	1.80m <sup>2</sup>
Pack Weight:	22.53kg
Packs Per Pallet:	50

## Manufacturer Testing Standard:

Standard:	EN14342:2013 - Multi-layer Flooring Board
Reaction to Fire:	Dfl - s1
Minimum Density:	650 kg/m <sup>3</sup>
Minimum Thickness:	18mm
Formaldehyde:	E-1
Thermal Conductivity:	0.16 W/mK

## Board Detail:

Type of Board:	Engineered Wood Flooring
Finish:	Brushed & Matt Lacquered
Bevel Detail:	4V Bevel
Density of Finish:	1.1g/cm <sup>3</sup>
Fix System:	T&G
Grade:	Rustic
Core Material:	Multiply
Janka Reading:	1360

## Misc Items:

Residential Warranty:	On Application
Commercial Warranty:	On Application
Oak Origin:	Europe
Manufactured In:	PRC
Installation Type:	<input checked="" type="checkbox"/> Float
	<input checked="" type="checkbox"/> Bond
	<input checked="" type="checkbox"/> Nail
Underfloor Heating:	Suitable for UFH if installed as floating floor with DPM underlay. - Manifold temp must not exceed 26°C

## Key Features:



## Accreditations:

