


modern vinyl floors

NEXT STEP LVT RICH LINE_ 4.2T

BARLINEK NEXT STEP LVT SPC meets the requirements of EN ISO 10582

180 x 1220 x 4,2T

CHARACTERISTIC	STANDARD	UNIT	RESULTS
Type of Flooring	EN ISO 10582		PVC Heterogeneous
Surface Treatment			High Density PUR Diamond Shield
Classification	EN ISO 10874		Class 23/31
Size	EN ISO 24342	mm	180 x 1220
Straightness & Squareness	EN ISO 24342	mm	≤0.35
Overall Thickness	EN ISO 24346	mm	4.2
Wear Layer Thickness	EN ISO 24340	mm	0.30
Wear Resistance	EN 660-2		T
Residual Indentation	EN ISO 24343-1	mm	≤ 0.10
Dimensional Stability	EN ISO 23999	%	< 0.15
Curling	EN ISO 23999	mm	≤ 2
Light Fastness	EN ISO 105-B02	mm	≥ 6
Furniture Leg Resistance	EN ISO 16581		No Crack, No Damage
Castor Chair Resistance	EN ISO 4918		No Change
Reaction to fire	EN 13501-1		B _f -s1
Stain Resistance	EN ISO 26987		No Change PUR Surface Treatment
Slip Resistance	EN 13893		Class DS
Slip Resistance	DIN 51130		R9/R10
Electrostatic Performance	EN 1815	kV	< 2
Warranty In Years			7 years - Commercial - LIMITED 25 years – Residential
Formaldehyde Class	EN 717-1		E1
TVOC After 28 Days	ISO 16000-06		A+
Thermal Resistance	EN 12667	m ² K/W	0.05

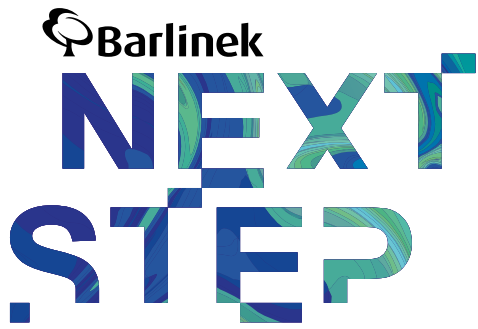

modern vinyl floors







NEXT STEP LVT RICH LINE_ 4.2T

BARLINEK NEXT STEP LVT SPC meets the requirements of EN ISO 10582

180 x 1220 x 4,2T

CHARACTERISTIC	STANDARD	UNIT	RESULTS
Underfloor Heating			Suitable Max 27°C / 80.6°F
Phthalate Free			N.D.
Heavy metal Free			N.D.
CE Marking	EN 14041:2004/AC:2006		DOP BSA/V2V5/DBE1



NAME		INDEX	CATALOGUE NUMBER	EAN CODE
SANTORINI SUN		V2DB-A31-SAN-12042M-138D	1V2000001	5906737990247
CARRARA STONE		V2DB-A31-CAR-12042M-130D	1V2000003	5906737990261
PACIFIC ISLAND		V2DB-A31-PAC-12042M-157D	1V2000005	5906737990285
CORAL BAY		V2DB-A31-COR-12042M-169D	1V2000002	5906737990254
RIVIERA MAYA		V2DB-A31-RIV-12042M-175D	1V2000004	5906737990278
MYSTIC ELBA		V2DB-A31-MYS-12042M-142S	1V2000006	5906737990292
NEVADA HEAT		V2DB-A31-NEV-12042M-157D	1V2000008	5906737990315
CAIRO DUSK		V2DB-A31-CAI-12042M-157D	1V2000007	5906737990308
PORT ROTTERDAM		V2DB-A31-ROT-12042M-175D	1V2000010	5906737990339
MODERN HAVANA		V2DB-A31-HAV-12042M-138D	1V2000009	5906737990322

Diamond Shield protective layer

with increased resistance to staining, microscratches and intensive use.

Wear layer


made of durable transparent vinyl. Waterproof, with perfectly reproduced wood structure.

Decorative layer


made to perfectly reproduce wood in high resolution.

Support board

made in the ECO STONE mineral core technology, with very high thermal durability, waterproof, extremely rigid, and highly dimensionally stable.

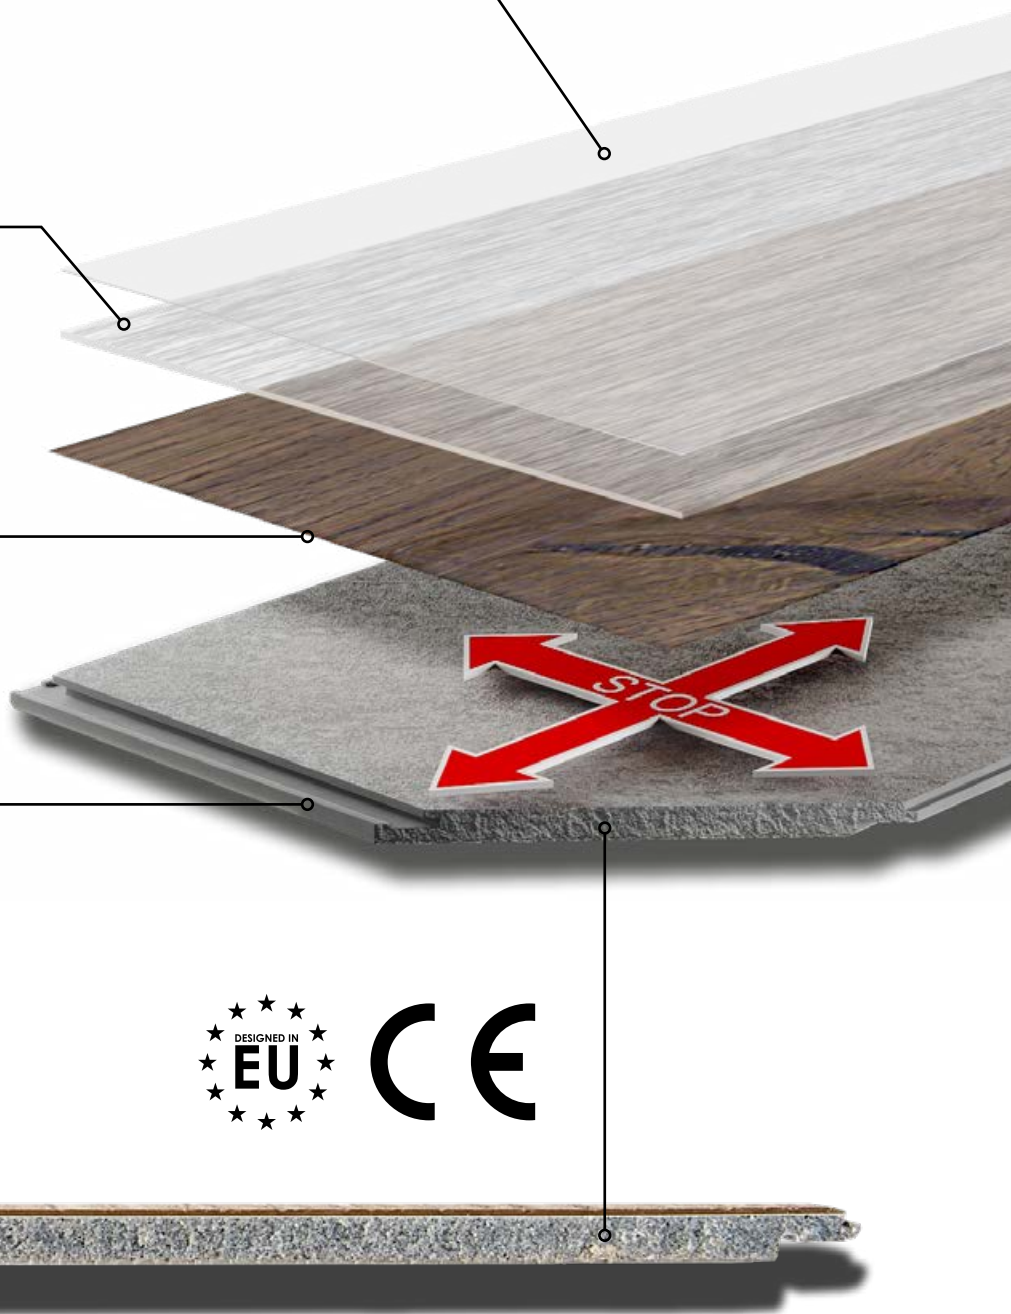

real wood look



stable structure



underfloor heating



100% waterproof



microbevel



Barlinek S.A.
al. Solidarności 36
25-323 Kielce, Poland
+48 41 333 11 00
e-mail: info@barlinek.com.pl
www.barlinek.com



SCScertified



Indicateur de la qualité d'émission de polluants volatils dans les locaux, permettant un choix de produits plus sains, sur une échelle de classe allant de A+ (pas de polluants) à C (plus de polluants).